

05-31-00

PATENT
Docket No. PD-200031

CUSTOMER NO.: 020991

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
APPLICATION TRANSMITTAL LETTER FOR
NONPROVISIONAL PATENT APPLICATION
Under 37 C.F.R. 1.53(b)

Certification under 37 CFR 1.10 (if applicable)

EF740978757US

EXPRESS MAIL mailing number

May 30, 2000

Date of Deposit

I hereby certify that this application is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

VICKIE CHUPP

(Type or printed name of person mailing application)

(Signature of person mailing application)

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application, including 4 sheet(s) of formal drawings, of inventor(s):

Ming U. Chang, Kar W. Yung, Frank A. Hagen, Donald C. D. Chang

for: MULTI-NODE WIRELESS COMMUNICATION SYSTEM WITH MULTIPLE TRANSPONDING PLATFORMS

The filing fee for this application is calculated below:

	CLAIMS AS FILED			
	NUMBER FILED	NUMBER EXTRA	RATE	
Basic Fee				\$ 690.00
Total Claims	18	-20 =	0 x	\$ 18.00
Claims	3	- 3 =	0 x	\$ 78.00
Multiple Dependent Claims			+	\$260.00
TOTAL FILING FEE :				\$690.00

Please charge Deposit Account No. 50-0383 of Hughes Electronics Corporation, El Segundo, California, in the amount of **\$690.00**. The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment, to that account.

The Commissioner is further hereby authorized to charge to said above Deposit Account No. 50-0383, pursuant to 37 CFR 1.25(b), any fees whatsoever which may properly become due or payable, as set forth in 37 CFR 1.16 to 1.17 inclusive, for the entire pendency of this application without specific additional authorization.

Please associate this application with the Hughes Electronics Corporation Customer Number 020991.

This form is submitted in triplicate.

HUGHES ELECTRONICS CORPORATION

MICHAEL W. SALES, Registration No.: 30,213
Attorney for Applicant(s)CUSTOMER NUMBER 020991
HUGHES ELECTRONICS CORPORATION
Patent Docket Administration
Bldg. 001, M/S A109
PO Box 956
El Segundo, CA 90245-0956
Telephone: (310) 662-9916
Date: May 30, 2000

PD 200031

MULTI-NODE WIRELESS COMMUNICATION SYSTEM WITH
MULTIPLE TRANSPONDING PLATFORMS

Ming U. Chang
Frank A. Hagen
Kar Yung
Donald C.D. Chang

Cross-Reference To Related Applications

The present application is a continuation-in-part of assignee's co-pending U.S. Serial No. 09/271,997, entitled "Multiple Satellite Mobile Communications Method and Apparatus for Hand-Held Terminals," filed on March 18, 1999.

Technical Field

The present invention relates generally to a wireless communication system. More specifically, the present invention relates to a wireless communication system with increased frequency re-use capability for point-to-point communication.

Background Art

Current mobile satellite communication systems, such as Iridium, Globalstar, and ICO, utilize low-cost user terminals as one of their key system features. To maintain communications linkage with these current mobile systems, the system satellites provide multiple beam and high-gain services to the subscribers. The low-cost and low-gain hand-held terminals utilized by the users of these systems, transmit and receive signals to and from high performance satellites which populate almost the entire hemisphere. Some of these current systems require access to at least two satellites to

assure a soft hand-over process as the satellites progress from horizon to horizon. As a result, the satellite system becomes more reliable and available as more satellites come into a user's field of view (FOV). The satellite constellations provided by these current systems are thus sized to guarantee a minimum number of satellites within a user's FOV over large coverage areas at all times.

All of these current mobile satellite communication systems, however, suffer from certain disadvantages. First, they all have limited frequency (the term "frequency" is generalized here to refer to frequency, time slot or CDMA code) resources. Any given frequency over a given ground position can only be utilized by one user at a time. Thus, if one user accesses a satellite using a particular frequency to communicate to his counterpart on the network, other satellites and/or users in the same region cannot reuse the same frequency resource in the same local area. In particular, if a nearby secondary user has a handset that requires the same frequency resource as is being utilized by the first user, the second user is unable to access the system, even via different satellites. This is true regardless of the sophistication of the system, including systems that utilize multiple beam satellite designs. Even when multiple satellites are available at a given geographic location, the same frequency spectrum cannot be used by more than one

limitations on frequency re-use for point-to-point communications.

It is another object of the present invention to provide a wireless communication system
5 that utilizes individual transponders and mobile terminals that are relatively simple and of low complexity.

It is a further object of the present invention to provide a wireless communication system
10 with high system reliability through graceful degradation.

It is still another object of the present invention to provide a wireless communication system wherein the complexity of the system is concentrated
15 at the central processing hub stations.

It is yet another object of the present invention to provide a wireless communication system with more accurate capabilities for satellite and/or user positioning.

20 In accordance with the objects of the present invention, a mobile wireless communication system is provided. The mobile wireless communications system includes a plurality of individual communication transponding platforms. The
25 plurality of individual transponders are each in

user in a local area. The availability of multiple satellites merely serves to increase the availability of the system to the user. However, the total capacity of these mobile communication satellite systems is still limited by their inefficient usage of the available frequency resources. Thus, the potential growth of these current satellite communication systems is inherently limited.

Additionally, current telecommunications systems generally allow only mobile-to-hub and hub-to-mobile communications in most low earth orbit and medium earth orbit mobile satellite constellations. Mobile-to-mobile linkages require multiple hops between hubs. This means that two or more frequency resources must be committed by the system to close the link.

It is clearly desirable to provide a mobile communication satellite system that relaxes the above constraints, and more efficiently utilizes current mobile satellite communication system resources, while also providing much greater opportunity for system growth.

Summary of the Invention

It is an object of the present invention to provide a wireless communication system with reduced

communication with a central processing hub such that a signal processed by the central processing hub in the forward link is radiated with compensating time delays to the plurality of individual transponders.

5 The radiated signals are then re-radiated by the plurality of individual transponders and coherently received and processed by a mobile user terminal. The return link signal path is the reverse of the forward link.

10 These and other features of the present invention will become apparent from the following description of the invention, when viewed in accordance with the accompanying drawings and appended claims.

15 **Brief Description of the Drawings**

FIGURE 1 is a schematic illustration of the forward link geometry of a mobile satellite communications system in accordance with the present invention;

20 FIGURE 2 is a schematic block diagram illustrating the signal transmission function of a ground telecommunications hub for a wireless communications system in accordance with a preferred embodiment of the present invention;

FIGURE 3 is a schematic illustration of the return link geometry of a wireless communications system in accordance with a preferred embodiment of the present invention;

5 FIGURE 4 is a schematic block diagram illustrating the signal receive function of a ground telecommunications hub for a wireless communications system in accordance with a preferred embodiment of the present invention;

10 FIGURE 5 is a schematic flow diagram illustrating the overall architecture for a multiple transponder wireless communications system in accordance with a preferred embodiment of the present invention; and

15 FIGURE 6 is a schematic illustration of a wireless communication system for point-to-point communication using a variety of different types of transponder nodes in accordance with a preferred embodiment of the present invention.

20 **Best Mode(s) for Carrying Out the Invention**

Referring now to the figures, the disclosed mobile communication system can be utilized to break away from the frequency spectrum limitation discussed above and provide much more efficient means to re-use
25 the allocated mobile satellite and wireless spectrum

multiple times. By eliminating this frequency spectrum limitation on the operation of multiple satellites, the overall capacity of existing mobile satellite and wireless communication systems can more readily expand.

Referring now to Figure 1, a mobile satellite communication system 10 in accordance with a preferred embodiment of the present invention is illustrated. In Figure 1, the mobile satellite communications system 10 is illustrated in a forward link mode. The mobile satellite communications system 10 includes a ground telecommunications hub 12, a satellite constellation 14 comprised of a plurality of individual satellites 16, and a plurality of hand-held user terminals 18 such as mobile phones. As discussed in more detail below, the user terminals 18 can receive signals simultaneously from multiple satellites 16 via broad beam antennas 22. The ground telecommunications hub 12 is in communication with all of the satellites 16 in the satellite constellation 14 individually and simultaneously. The hub 12 also pre-processes user signals to compensate for path differentials before sending radiated signals 24 to the satellites 16, as discussed in more detail below, and similarly post-processes signals received from the satellites.

In accordance with the preferred embodiment, the design of the individual satellites

14 can be significantly simplified over those utilized in prior mobile systems because the satellite constellation 14 functions as a sparse radiating array. It is known that the more
5 satellites 16 that are included in a satellite constellation 14, the better the performance the mobile satellite communications system 10 will achieve. Satellites that are simple, small, and provide high performance are preferable. This is
10 because the performance of the system 10 depends more heavily on the satellite constellation 14 than on the individual satellites 16.

In a transmit mode, shown in Figure 1, the individual satellites 16 radiate modulated RF power
15 to a chosen field of view ("FOV"). The system 10 is still operable with reduced capacity and no reconfiguration even if one individual satellite 16 is lost for any reason. As a result, the system 10 features graceful degradation characteristics and
20 provides very high reliability and availability. Most of the complexity of the system 10 is located in the ground hubs 12, which locate and track the potential users and perform the major functions of beam-forming and filtering, as discussed below.

25 As shown in Figure 2, the processing performed at the ground telecommunications hub 12 is diagrammatically illustrated. The hub 12 tracks, updates, and forward predicts the time variant

5

15

The ground telecommunications hub 12 has a processing center 26 that processes each signal and

is shown in a transmit mode in Figure 2. The hub 12 has the capability to address the plurality of satellites 16 individually through the use of antenna spatial discrimination to provide separate signals to
5 different satellites. Alternatively, code identification can also be used to address different satellites independently.

As shown in Figure 2, assuming that there are "H" users, the signals from user 1 to user H,
10 identified generally by reference number 28, are input into the processing center 26. The positions of the various users (1 to H), designated by reference number 30, are determined generally by the circuitry from the various user signals 28. The
15 various user signals 28 for user 1 to user H are then combined for transmission to the different satellites 16, as generally indicated by reference number 32. In this case, the signal is sent to N satellites. The combined signals are then amplified, filtered, up
20 converted, and then further amplified, as generally indicated by reference number 36. These signals are then delivered to a multiple beam antenna 38 where beam-forming processing is done so that the signals can be transmitted to each of the N satellites via
25 radiating signals 24. The beam-forming process can be done in baseband or a low IF frequency band by either digital or analog means. For a low bandwidth (less than a few MHz) signal, digital implementation can provide cost advantages. The processed signal

24, radiated from the ground hub 12 to each satellite, is amplified, filtered, and then re-radiated by each of the multiple satellites 16 to arrive at a designated user location simultaneously. Consequently, the radiated signals from the multiple satellites will be received coherently by a simple hand-held terminal 22.

Equivalently, the effect of the spatial processing performed by the processing center 26 is to focus signal strength on the user from multiple satellites 16, which act like sparsely separated portions of a large active reflector. Therefore, the processing on the ground will insert different time delays into the signals 24 which are radiated via various paths (i.e., transponders). The time delays will be inserted into the signals 24 as if the satellites were located on an ellipsoidal surface, of which the two foci are located exactly at the hub 12 and the designated user 18 positions respectively. In low and middle earth orbit constellations, the users 18 and the hub 12 will always be in the near field of the sparse array.

In receive mode, shown in Figure 3, the individual satellites 16 collect RF signals from the same FOV. Figure 3 illustrates the return link geometry for receiving signals sent from the user terminals 18 to the ground telecommunications hub 12. As shown in Figure 3, there are two groups of links

involved: the links between users 18 and the satellites 16, generally indicated by reference number 40, and those between the satellites 16 and the hub 12, as generally indicated by reference
5 number 42. For best performance, the user antennas 22 preferably are able to illuminate all the satellites 16 involved. This will lead to a constraint on the variation of the gain of the user antenna 22 over the cluster.

10 As with the forward link geometry, the satellites 16 will amplify the signals 40 received from the users 18 and re-radiate the signals 42 toward the hub 12. The hub 12 can receive signals 42 independently, but simultaneously from the satellites
15 16, and will add the signals 42 from different satellites coherently in the post-processor 44 as illustrated in Figure 4.

The signal flows on the block diagram shown in Figure 4 illustrate the receive function of the
20 post-processor 40 and the hub 12. The signal flows are reversed from the corresponding ones in Figure 2. Therefore the receive process will not be reiterated in detail. However, the links 42 from the satellites 16 to the hub 12 are received at the beam-former 38
25 and then transferred to the receiver and down converters 46 before the signals are separated. The signals are separated depending upon the user from which they are received, as generally indicated by

reference number 48, and then sent to the specific user 1 through H, as generally indicated by reference number 50. It should be understood that both the receive and transmit functions are necessary parts of the pathlink calibration and user positioning.

The technique of the present invention has been demonstrated to significantly reduce the average sidelobe levels. It has been determined that this is due to three factors. First, the proposed architecture is not a periodic array, but rather a randomly spaced sparse array, which has no grating lobes. Although the average sidelobe level at a single frequency is relatively high, the level decreases with increasing bandwidth. Second, the large sparsely filled array formed by the satellites is a large extended aperture. Thus, all of the users on the ground are in the near field of the extended aperture and the wavefronts received by all users are spherical instead of planar. Consequently, dispersion effects become much more pronounced than would be the case in the far field. The dispersion grows very fast as a probe is scanned away from the main beam and the dispersion smears the power distribution very effectively over a finite signal bandwidth. Third, the communication system is preferably designed with a large frequency bandwidth. The information signal will therefore be spread over this bandwidth via CDMA or through short duration waveforms for TDMA schemes.

Figure 5 illustrates diagrammatically the operation of the invention, which allows for the increased re-use of precious frequency spectrum by multiple satellites. The advantages provided by this system include no limitation on frequency re-use by additional satellites for point-to-point communications. Rather, the capacity of this system is only limited by total satellite RF power. Further, the preferred embodiment allows for the use of simple and low cost satellite designs, because the more satellites included in the constellation, the better the performance of the overall system. The system also provides high system reliability through graceful degradation, as well as concentrating complex processing at the hubs.

The preferred embodiment creates demand for a large number of low cost satellites and also uses R2N techniques to perform satellite and user positioning. The more users using this system, the more accurately the satellite and user positions can be determined. However, even more important than the actual positions of the users and satellites are the path lengths traversed by the signals. Therefore, periodic calibration techniques applied directly to those path lengths may be much simpler and more cost effective. The system also benefits from the large percentage bandwidths available with CDMA and TDMA systems.

As shown in Figure 5, the present invention is divided into three segments: a hub segment 52 containing the ground telecommunications hub 12, a space segment 54 containing a plurality of individual
5 satellites 16, and a user segment 56, having a plurality of user terminals 18. The hub segment also has a processing center 26 which pre-processes the transmittal signals and post-processor 44 for post-processing the received signals.

10

The user terminals 18 receive and transmit signals simultaneously from/to multiple satellites 16 via broad band antennas. The user terminals 18 do not require any capability to separately address the
15 individual satellites 16 in the space segment 54. The hub 12 pre-processes the signals intended for each local user on transmission and post-processes the signals supplied to each local user on reception to compensate for path differentials. These
20 corrections are separately computed and applied to the signals transmitted to or received from each satellite 16 of the space segment 54. While the invention thus far has been discussed in connection with a plurality of satellites 16, it should be
25 understood that a variety of other transponder nodes can be utilized instead of or in combination with one or more of the satellites 16.

Referring now to Figure 6, an exemplary wireless communication system 100 in accordance with the preferred embodiment is illustrated. The exemplary wireless communication system 100 includes
5 a central hub 102, a transmitter tower 104, a satellite transponder 106, a high altitude platform 108, an antenna 110, and an intended user 112. The intended user 112 may be either a fixed user or a mobile user.

10 The central hub 102 is in direct communication with the antenna 110 in order to process the signals transmitted to and received from the antenna 110, in accordance with the techniques described above. In accordance with this exemplary
15 embodiment, the central hub 102 also communicates with the transmitter tower 104 through line 114 in order to perform the processing of signals transmitted to and received from the transmitter tower 104. The line 114 may be a ground wire or may
20 represent a wireless communication between the central hub 102 and the transmitter tower 104. Further, while only a single antenna 110 and a single tower 104 are illustrated, it will be understood that multiple antennas and multiple towers may be
25 employed. Further, the tower 104 may be part of a regional or national tower-based cellular network for either fixed or mobile communications.

As shown, in the example, the central hub 102 processes signals 116 that are transmitted from the antenna 110 to a high altitude platform 108. In the forward link, the signal 116 is then transmitted
5 from the high altitude platform 108 to the intended user 112, as represented generally by the signal 118. In the return link, the intended user sends a signal 118 to the high altitude platform 108 which then sends a signal 116 to the antenna 110, which is then
10 processed by the central hub 102. Further, the central hub 102 also processes signals 120 that are transmitted by the antenna 110 to a satellite transponder 106. The satellite transponder 106 then transmits the signal 122 to the intended user 112.
15 In the return link, the intended user 112 sends a signal 122 to the satellite transponder 106, which then sends the signal 120 to the antenna 110 for processing by the central hub 102.

Additionally, the central hub 102 sends a
20 signal 114 to the transmitter tower 104, which in turn communicates with the intended user 112 through a signal 124. In the return link, the intended user 112 communicates with the tower 104 through a signal 124, which then communicates with the central hub 102
25 through line 114 for processing of the signal. While only a single transponder node (i.e., satellite, high altitude platform or tower) of each type is disclosed, a specific system may utilize any combination of such transponder nodes. It should be

understood that any high altitude platform system such as manned/unmanned airships, balloons, or airplanes may be utilized in accordance with the disclosed system. Further, any space-based system
5 that involves one or more spacecraft for point-to-point communications may be utilized in accordance with the disclosed system.

The disclosed exemplary system 100 can greatly improve frequency re-use efficiency for
10 point-to-point communications such as those in multiple telephone and two-way Internet protocol. This improved capability results from the fact that the information for the intended receiver (user) 112 will arrive from all transponders in-phase. By this
15 configuration, information for non-intended users will generally arrive out-of-phase. For non-intended users, the out-of-phase signals will appear as noise. The performance of the proposed invention will depend upon the spatial separations between the various
20 transponder nodes, as well as the remote users. The communication bandwidths between the transponders and the users will also impact the performance. The effect of these on the disclosed system 100 can be determined in a variety of known ways.

25 Thus, the present system 100 can be comprised of a plurality of transponder nodes that are solely part of a pure tower-based system, a system of high altitude platforms, such as a

5 Having now fully described the invention,
it will be apparent to one of ordinary skill in the
art that many changes and modifications can be made
thereto without departing from the spirit or scope of
the invention as set forth herein.

In The Claims:

1 1. A mobile wireless communication
2 system, comprising:

3 a plurality of individual transponding
4 nodes;

5 a central processing hub in communication
6 with each of said plurality of individual
7 transponding nodes, such that a signal processed by
8 said central processing hub is radiated with
9 compensating time delays to a plurality of said
10 individual transponding nodes; and

11 a plurality of mobile terminals associated
12 with respective remote users for receiving said
13 radiated signals from each of said plurality of
14 individual transponding nodes simultaneously.

1 2. The wireless communication system of
2 claim 1, wherein one or more of said plurality of
3 individual transponding nodes is an individual
4 satellite.

1 3. The wireless communication system of
2 claim 1, wherein one or more of said plurality of
3 individual transponding nodes is a high altitude
4 platform.

1 4. The wireless communication system of
2 claim 1, wherein one or more of said plurality of
3 individual transponding nodes is a transmitter tower.

1 15. The method of claim 8, wherein said
2 signals are received by a space based system.

1 16. A mobile wireless communication system
2 for mobile users, comprising:

3 a plurality of individual transponder nodes
4 selected from one or more of the following node
5 types: a tower based cellular network, a high
6 altitude platform system or a space-based satellite
7 system;

8 a central processing hub in communication
9 with each of said plurality of individual transponder
10 nodes, whereby a signal processed by said central
11 processing hub is radiated with compensating time
12 delays to said plurality of individual transponders;
13 and

14 a mobile terminal associated with an
15 intended user for receiving said radiated signals
16 from each of said plurality of individual transponder
17 nodes coherently;

18 whereby said radiated signals, if received
19 by a non-intended user, are received incoherently.

1 17. The mobile wireless communication
2 system of claim 16, wherein said plurality of
3 individual transponder nodes that radiate said
4 signals to said intended user are all of the same
5 type.

1 18. The mobile wireless communication
2 system of claim 16, wherein said plurality of

Abstract

A mobile wireless communications system including a plurality of individual transponding platforms all in communication with a central processing hub. A signal processed by the central processing hub is radiated simultaneously through multiple paths to a plurality of the individual transponding platforms. The signal transmitted to each transponding platform by the hub is appropriately delayed by the hub so as to equalize the differential delay of all such signals from a given receiver location. The radiated signal is then re-radiated by each of the plurality of individual transponding platforms to a mobile satellite terminal that receives the re-radiated signal from the plurality of individual transponding platforms. The signals from the plurality of transponding platforms are all received coherently by the intended user, and incoherently by all other users.

The diagram illustrates a communication system architecture. On the left, a group of rectangular blocks labeled 'RECEIVE PROCESSING CENTERS' is indicated by reference numeral 12. On the right, a group of mobile devices labeled 'USERS' is indicated by reference numeral 18. These users are shown with antennas and are connected to the processing centers via multiple communication links. A set of solid lines, labeled 10, connects the processing centers to the users. A set of dashed lines, labeled 14, also connects the processing centers to the users. A set of dotted lines, labeled 16, connects the processing centers to the users. A set of dash-dot lines, labeled 40, connects the processing centers to the users. A bracket labeled 42 groups the dashed lines (14) and the dotted lines (16). The diagram shows a dense network of connections between the processing centers and the users, representing a multi-user environment.

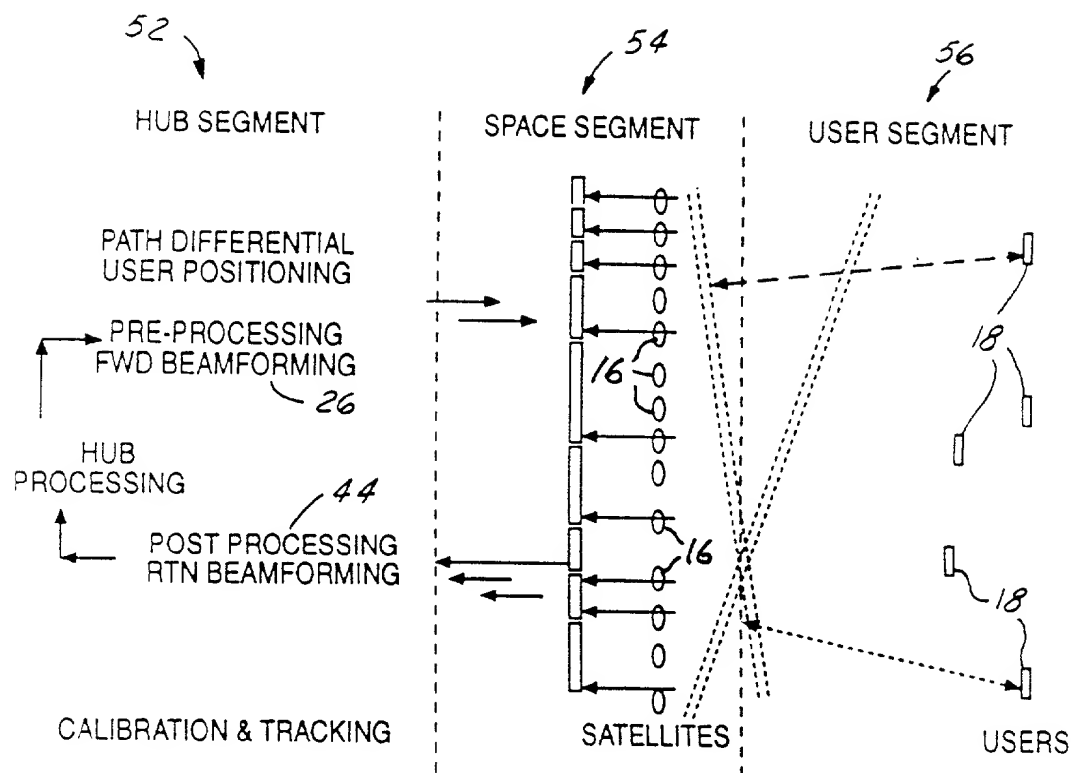


FIG. 5

FIG. 6 is a block diagram of a system 100 for providing location information to a user.

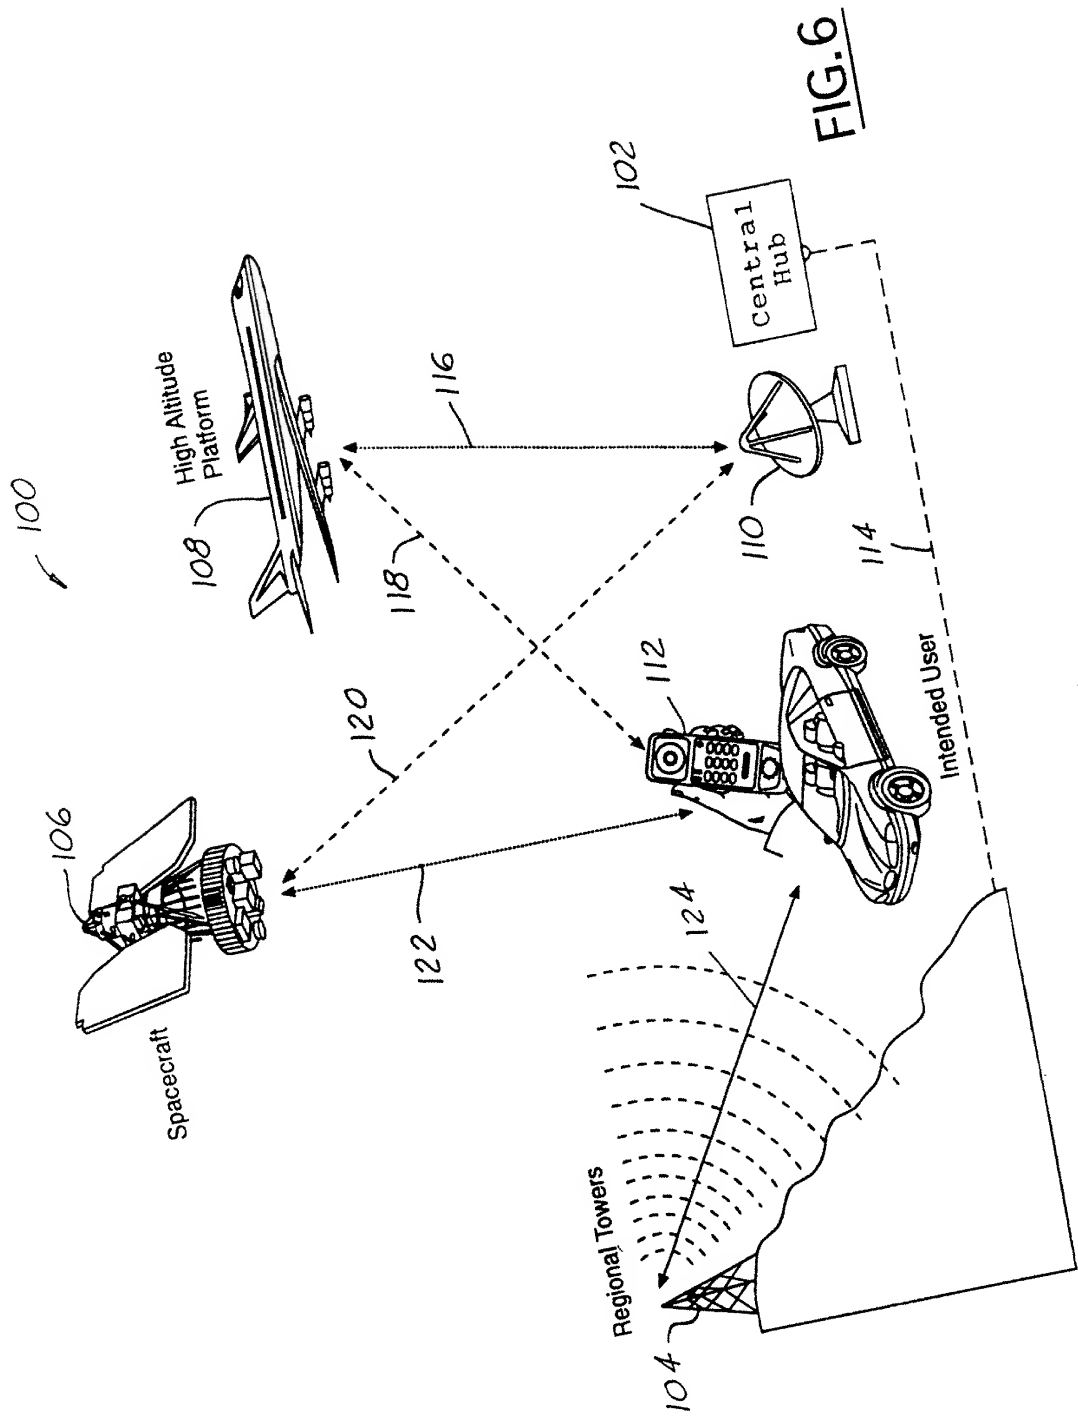


FIG. 6



COMBINED DECLARATION FOR PATENT APPLICATION
AND POWER OF ATTORNEY

Page 1 of 2
PD-200031

- ☒ Original
☐ Continuation
☐ Division
☐ Continuation-in-part
☐ Supplemental

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **MULIT-NODE WIRELESS COMMUNICATION SYSTEM WITH MULTIPLE TRANSPONDING PLATFORMS**

the specification of which

- (check one) ☒ is attached hereto.
- ☐ was filed on _____ as Application Serial No. _____ and (a) [other than supplemental] was amended on or (b) [supplemental] with amendments through _____.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

			Priority Claimed
			<input type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	
Number	Country	Day/Month/Year Filed	

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

_____	_____	_____
Application Serial No.	Filing Date	Status
		(patented, pending, abandoned)

I hereby appoint the following attorneys, or agent and attorneys, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:





Bradley K. Lortz,
Vijayalakshmi D. Duraiswamy,
Michael W. Sales,

Registration No. 45, 472,
Registration No. 31,505,
Registration No. 30,213.

Address all telephone calls to , Michael W. Sales, (310) 66209916

Address all correspondence to **Customer Number 020991 (Hughes Electronics Corporation, Patent Docket Administration, Bldg. 001, M/S A109, PO Box 956, El Segundo, California 90245-0956).**

I hereby declare that all statement made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR JOINT INVENTOR MING U. CHANG	INVENTOR'S SIGNATURE 	DATE 5/23/2000
RESIDENCE (CITY AND STATE) 28815 Indian Valley Road, Rancho Palos Verdes, California 90275		CITIZENSHIP U.S.A.
POST OFFICE ADDRESS 28815 Indian Valley Road, Rancho Palos Verdes, California 90275		
FULL NAME OF SOLE OR JOINT INVENTOR KAR W. YUNG	INVENTOR'S SIGNATURE 	DATE 5/22/2000
RESIDENCE (CITY AND STATE) 4738 Narrot Street, Torrance, California 90503		CITIZENSHIP U.S.A.
POST OFFICE ADDRESS 4738 Narrot Street, Torrance, California 90503		
FULL NAME OF SOLE OR JOINT INVENTOR FRANK A. HAGEN	INVENTOR'S SIGNATURE 	DATE 5/17/00
RESIDENCE (CITY AND STATE) 2309 Via Rivera, Palos Verdes Estates, California 90274		CITIZENSHIP U.S.A.
POST OFFICE ADDRESS 2309 Via Rivera, Palos Verdes Estates, California 90274		
FULL NAME OF SOLE OR JOINT INVENTOR DONALD C. D. CHANG	INVENTOR'S SIGNATURE 	DATE 5/18/2000
RESIDENCE (CITY AND STATE) 2350 Moberly Court, Thousand Oaks, California 91360		CITIZENSHIP U.S.A.
POST OFFICE ADDRESS 2350 Moberly Court, Thousand Oaks, California 91360		
FULL NAME OF SOLE OR JOINT INVENTOR	INVENTOR'S SIGNATURE	DATE
RESIDENCE (CITY AND STATE)	CITIZENSHIP	
POST OFFICE ADDRESS		